

THE PROPER SELECTION

An application-by-application comparison of infrared vs. radio frequency assisted listening systems.

By Steve Harris



Photos, courtesy of Soundhelix, are of the Old South Meeting House, Boston, (top) and the Eastman Theatre at the University of Rochester (bottom).

Since the institution of the ADA, wireless sound transmission has grown from near obscurity to a major source of income for sound contractors. Both radio frequency (RF) and infrared (IR) systems have found a multitude of venues and applications. Originally, each had its distinct application and market. Now, the line between IR and RF has blurred; the principal difference between the two systems boils down to the method used to transport the audio signal to the end user. An RF system uses radio waves, while IR sys-

tems use infrared light. Each system has its own special benefits based on the properties of each signal.

Theater applications

For the sake of this exercise, we will divide legitimate theaters into four separate categories. The large theater seats between 1,000 and 2,000 people. It will typically contain several seating areas—an orchestra level, mezzanine, logs, dress circle balcony. This is the type of theater found on Broadway or where major national tours are housed in other cities.

Using RF for the ALS immediately creates certain problems. Communication from the stage manager to the lighting board, spot operators and sound console is accomplished with RF systems and where ever the sets and lights dance and move about the modern stage, the airwaves are more crowded because each set piece and light is controlled by RF signals. Especially on Broadway, RF could become a nightmare for the production stage manager and the patrons using an ALS. The most reliable choice in this situation would be an IR system.

The most difficult part of installing an IR system is the design. Emitter placement is important to get the maximum coverage of the space. Two emitters specified to fill 6,000 ft² (557 m²) to 12,000 ft² (1,115 m²) can be placed on either side of the proscenium to give a nice fill. Angling each emitter slightly toward the center of the seating area will also give coverage if a patron should turn his head. If a balcony covers more than three or four rows beneath it, place two smaller emitters covering 2,000 ft² (186 m²) to 4,500 ft² (422 m²) under the balcony to give a strong signal to the orchestra level.

Higher levels typically require their own set of emitters. The size of emitter required is related to the size of the area. Smaller theaters like the Helen Hayes Theater in New York City, with only 200 seats in the mezzanine, require small emitters like the ones used for under-balcony coverage. The Broadway Theater, on the other hand, has approximately 700 seats in the mezzanine. The IR designer used four emitters—two in the front and two in the rear, on the side walls, facing toward the center. The seating area was long and narrow. If the space had been more wide than deep, it could have been covered just as well with two larger emitters. Some theaters have both a mezzanine and a balcony. New York City's Walter Kerr Theater has a shallow mezzanine and a shallow balcony. Two large emitters cover both areas nicely.

Additionally, most first-class touring houses will seat more than 2,000 to 3,000. The North Carolina Blumenthal Performing Arts Center, Charlotte, NC, consists of 2,100 seats on four levels. To get the coverage required, Blumenthal's head sound engineer, Ross Graf, chose IR because of "its clarity and minimal chance of interference."

Another factor to consider in the type of IR system to use is flexibility. Unless your theater is lucky enough to see *Cats* or *The Fantastiks*, which will both run for years, chances are



you will have to move the emitters at least once. Consider the lighting designer who hangs a lamp right in front of your emitter or the set designer who wants to extend the set past the proscenium arch and tells you the emitters detract. Reinstalling new AC outlets at each emitter location can be costly, and running AC cable through the audience is unsightly. The solution is choosing a system that offers DC-powered emitters. A system that allows both AC and source signal to run through the same cable would be ideal. One less cable to each emitter is one less part to malfunction.

Theater venues that seat up to 300 people on one level are fairly easy to design. The same rules would apply for larger theaters, with one additional consideration. Quite often, these smaller theaters are referred to as black box theaters because they are rooms painted black with a playing area in the front. There is frequently no real proscenium arch. If this is the case, placement of a large-area emitter may seem sufficient. The black box theater, we must remember, is painted black, and since IR light has the same properties as any other light, lighter colors can bounce the light around, thereby increasing the coverage area, but darker colors absorb the light. Therefore, it might be wiser to use two medium-area emitters, one on each side of the stage for wider spaces or one in the front and another midway back for narrower ones.

In theaters like the Vivian Beaumont at Lincoln Center, New York City, where the audience sits on three sides of the stage, typical rules for focusing IR cannot be applied. Hanging emitters on the side of the stage and cross-focusing will put the highest concentration on the thrust of the stage. Angling them to cover the sides of the stage will leave a dead area in the center. Focusing the main emitters on the center area with a slight intersection and supplementing the seating areas to



(Left) Audex's SoundMate personal listening systems.

(Right) Phantom Ear Starsound PE-4205 panel.

the side of the stage with an additional emitter on each side will achieve the desired coverage. If interference is minimal, this type of theater could also use an RF system to avoid multiple angles.

When the seating area completely surrounds the playing area, each section should be covered as if it were the only section. Emitters should be hung from the ceiling, preferably off lighting fixtures. Emitters are then hung at the corner of each section and cross-focused. If the playing area is not symmetrical, like Circle in the Square, New York City, which is really more of a rectangle, hanging and focusing takes a slightly different approach. In this instance, six emitters were used—one emitter on each

short side and two emitters on each long side. The two emitters on the long sides are focused across the stage to the opposing seating area, giving a wider angle of coverage. The two remaining emitters on the short side are focused directly at the seating area in front of them.

The growing popularity of the multiplex movie house presents a completely different set of problems. A multiplex can have more than four movies playing simultaneously. This means more than four different signals being sent. To use RF, the owner would have to supply a multi-channel receiver. The downside to this is that even though the channel has been chosen and the patron told not to touch it, he will, and when he is sitting in the theater watching *Shakespeare in Love* but hearing *Saving Private Ryan*, he will be upset. A more costly solution would be using single channel receivers, but it can be more trouble than its worth, trying to keep the receivers organized. There is also the possibility of not having enough receivers for a particular

• ASSISTIVE LISTENING GALLERY •

Assistive Listening and Beyond

Break through the sound barrier with Gentner's digital ALS products. We carry ADA compliant systems and the first system available for non-ADA uses—the 216 MHz Ventures. Call today.

Gentner

1-800-765-9026 • 1-901-975-7200

www.gentner.com

Perfect Communication through Technology, Service, and Education.™

Circle 121 on Reader Service Card

Since 1984 Audex Innovative Ideas Have Energized the Assistive Devices Industry! ** Now There's More!


- § Audex Light & Link receivers resist electronic ballast lighting interference while remaining 95 KHz compatible!
- § Audex has conquered the use of Infrared out-of-doors in daylight.
- § Audex has joined forces with Siemens Hearing Instruments, the world's largest hearing aid manufacturer, creating a steady flow of ADA compliance leads from over 1300 hearing aid dispensers, to be distributed to Audex contractor/dealers.
- § Greater profits ** 95 KHz Compatibility ** Qualified Leads

You Should be Installing AUDEX!



710 Standard St. • Longview, TX 75604 • 800-237-0716 • www.audex.com

Circle 123 on Reader Service Card

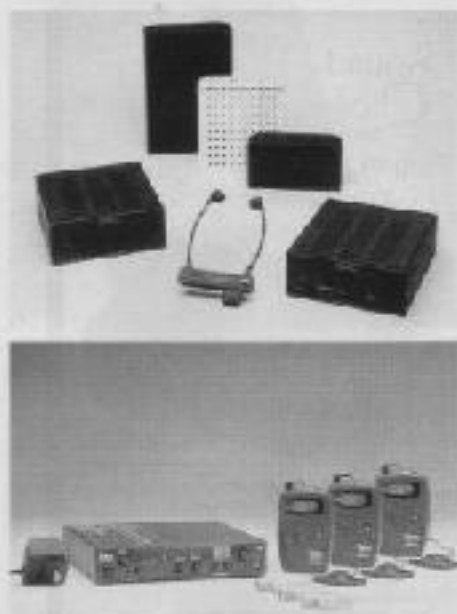

(Top) Sound Associates SA801 transmitter receiver and power supply. (Bottom) Listen Technologies LT-800 transmitter and LT-800 receiver.

Theater.

In this situation, IR would be the system of choice. Although each theater would require its own transmitter, just like RF a single-channel receiver could be used in any theater at any time. Some movie houses will place a medium-area emitter to the side of the screen, which is usually more than enough coverage. Some theaters choose to place the emitter in the rear. Instead of using the typical under-the-chin receiver, a headphone with the switching diode on top is used. Although this is efficient, it can be distracting to the patrons sitting behind the user.

Because churches vary in size and shape as much as theaters, the same

design principles apply. Originally, the market was strictly RF, but in the past five to seven years, use of IR for ALS has steadily grown. Assuming the facility is not around the corner from a bus depot, choosing a system really comes down to cost and quality. It may be desirable in houses of worship for the signal to penetrate the walls into such other areas as cry rooms, nurseries or other gathering areas. An RF system would be a good choice in these cases.

Places of business

The boardroom is one of the last frontiers to get in step with the ADA. Several factors must be taken into account when designing for corporate meeting spaces. Confidentiality is often an issue, and if this is the case, IR is the system to use. Many boardrooms use electronic ballast fluorescent lighting, however, which has been known to interfere with the IR signal modulated at

ALS ACCESSORIES

By John Merline

An important step in providing hearing accessibility is providing the right listening accessory. An accessory is the earbud, headset or other device that delivers the sound from the ALS receiver to the listener's ear, and it is one of the most difficult pieces of equipment for facility managers to understand because there are so many options. When 28 million Americans have hearing loss ranging from mild to profound, this variety makes sense.

There are two main types of receiver—the self-contained receiver, usually a headset or under-the-chin unit, and a flexible body-worn receiver with interchangeable listening accessories. Self-contained receivers are placed on the head; body-worn receivers require a listening accessory to be plugged into the earphone jack. The most common types of plug-in accessories are teleloops, steno-clips, earbuds and personal-stereo-type headsets.

For general use, almost any accessory would be fine, but to ensure hearing accessibility, there are definite requirements. Visitors asking for hearing assistance fall into two main groups—those who wear hearing aids with telecoils and those who do not. To offer the best customer service and comply with pending ADA revisions, facilities must offer accessories satisfying both groups.

Although guests with a telecoil (or T-switch) in their hearing aids can use a headset, they generally prefer a body-worn receiver with a teleloop because it is more comfortable. A telecoil is a tiny coil of wire built into many hearing aid models. When the hearing aid is set to the T position, the telecoil picks up a sound signal inductively—from a telephone receiver, headset earpiece or another electromagnetic generator. A teleloop is a loop of wire placed around the neck that radiates a sound signal via an electromagnetic field. Because of their simplicity, teleloops require little maintenance.


For guests who do not use a hearing aid with an integrated telecoil or T-switch, a steno-clip earbud set or headset is acceptable, but guests with hearing aids may wish to remove them. Plug-in steno-clips and under-the-chin self-contained receivers resemble a doctor's stethoscope. They can often deliver more gain than any other accessory, but because steno-clips are inserted far into the ears,

the facility must replace the earplugs frequently to keep the equipment sanitary. Earbuds, tiny padded earpieces, are familiar to personal stereo users. They provide low to moderate gain and good cosmetic appeal because of their small size. As with steno-clips, however, the facility staff must stock replacement earpads to ensure that the accessories remain clean. Headsets, whether as a self-contained unit or a plug-in accessory, are simply placed over the ears. Management of headsets is easy because the earpieces are not inserted in the ears. In addition, the simplicity and ease of storage offered by self-contained headsets makes them especially convenient for facilities.

You might guess that headsets would be the choice for almost all installations because they seem to cover the basic needs of people with and without telecoil hearing aids, but be careful. Hearing assistance is becoming as much a matter of customer service as of compliance with the law. Because teleloops are so strongly preferred by hearing aid wearers, it is a good idea for sound pro and facilities to offer a combination of teleloops and other steno-clips, earbuds or headsets. A 1:2 teleloop-to-steno-clip/earbud/headset ratio works well.

As millions of baby-boomers begin to notice the effects of years of rock concerts and power tools, your ALS expertise will grow in demand. With high quality products and your knowledgeable service, you can make facilities in your community attractive to people with hearing impairment, which is rewarding not only in itself, but also in referrals and repeat business.

Merline is the marketing communications manager for Phonosoft. He can be reached at 1-800-227-1126, ext. 23 or john_merline@phonosoft.com.

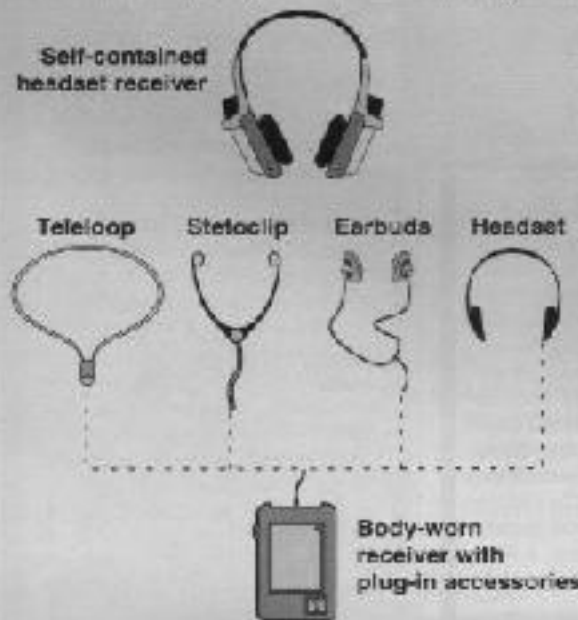

95 kHz. These new fluorescent bulbs will not cause the same interference with RF, but these channels cannot be secured. The compromise would be an IR system with a higher frequency. Most manufacturers carry a line of IR products at 250 kHz, and a few have started making systems with modulated frequencies of 2.3 MHz.

Classrooms can present the same problems as boardrooms in regards to fluorescent lighting, although security is seldom a consideration. IR may not be the practical solution. Quite often, a system used in the classroom must be portable, as a student travels from classroom to classroom. An RF system where both the receiver and transmitter are portable is ideal. The student can easily transport the system, and the instructor can wear the transmitter with a small lavaliere mic, giving the student access in such classroom and lecture hall.

As with boardrooms, confidentiality is often the main consideration. Again, IR will achieve assistive listening while confining the signal within the room. The only other point to consider when choosing a system is confidentiality within the courtroom. Mics should be placed at the prosecution and defendant tables, at the witness box and on the judge's bench. Choosing a system that allows the judge to mute private conversations at his or her bench will keep the jury members wearing ALS devices from hearing things not intended for the jury.

More and more conferences, seminars and conventions are being held in meeting spaces within hotels. The rooms can be as small a classroom or as large as a grand ballroom. Often, these warehouse-type spaces can be divided into smaller spaces by panels hidden within the wall. Fluorescent lights are often used, which means there is a chance of interference if fixtures are electronic ballast. Conferences and seminars may begin as one large meeting, then later break into focus groups, each in a separate room. By using IR, the same receiver can be used in the large meeting and in any of the smaller meetings. The end user can move easily from one meeting to another without switching channels or changing headsets.

Other venues

Museums often have several different applications for wireless systems. Theaters, lecture halls, and movie houses can be laid out in the same manner, but the unique application for museums is the use of wireless to transmit commentary for both assistive listening and foreign language translation at a series of exhibits. The first impulse might be to stay away from RF because multiple transmissions on the same frequency

INTERFERENCE ISSUES

By Todd Bergum

Both RF and IR systems can be interfered with but by completely different sources. RF systems can be interfered with by other radio signals. The long-standard 72 MHz to 76 MHz frequency range is approved for use under part 15 of the FCC rules for hearing assistance applications, yet cannot generally be licensed as such. Added to this, there are licensed services using these same frequencies at much higher field strength levels than allowed for hearing assistance. A user experiencing interference on a 72 MHz to 76 MHz ALS, as the unlicensed user, has no recourse other than to move to a different channel. Systems that may have been installed for years can suddenly be subject to interference by a newly licensed source, although this rarely happens. There are now some newly issued frequencies in the 215 MHz to 217 MHz range, which are limited to power output levels of 100 mW or less under the Low Power Radio Service (LPRS) parameters of the FCC guidelines for these frequencies. This reduces the chance of interference as compared to the 72 MHz frequencies. Keep in mind, there are tens of thousands of RF ALS devices installed throughout the world, and the vast majority of these operate smoothly without experiencing any significant RF interference problems.

IR systems can be interfered with by undesirable light sources. The most common cause of interference in IR systems is direct-reflected sunlight. The next most common cause is interference from high-efficiency, high-frequency fluorescent lighting systems, which are becoming more popular as energy-saving alternatives to standard fixtures. This generally affects systems in the most popular and cost-effective 95 kHz frequency range. Many of these lighting systems use a 25 kHz modulator whose second harmonic is 101 kHz and close enough to 95 kHz to cause problems with many standard receivers. Even the next popular frequency, 250 kHz, is close enough to the third harmonic, 201 kHz, to be interfered with. This has brought about the introduction of some newer systems in the 2.3 MHz to 28 MHz spectrum that successfully avoid these problems.

Bergum is regional sales manager for Telen Communications, Minneapolis.

cause severe interference. Using a multi-channel system can be awkward, forcing the user to change channels on the receiver constantly. An efficient, practical solution is using a series of IR emitters. The small area emitters can be focused expressly in the designated area with each emitter connected to a dedicated transmitter. The area between exhibits can be covered with its own emitter. Sending a non-signal down the line to these emitters will keep the signal even while moving from exhibit to exhibit. This allows the facility to use a single channel IR headset/receiver that can be used at all the exhibits and any lecture halls or theaters.

Amphitheaters are typically laid out like any other theater, except there are no walls and no ceiling. IR does not function well in direct sunlight. Even on overcast days and nights, it is difficult to get coverage to the seating area. Without walls to contain the light, it simply dissipates. Under these conditions, RF would be the system to choose. The caution would be to choose a frequency that is not close to another already in use.

In the past, guided tours have used a portable amp/speaker with a mic input, packaged in a small case that can be carried on the shoulder. The two drawbacks to this method are weight and the system's inability to eliminate ambient noise. IR is not very portable, and if the tour were outdoors, sunlight would interfere. Most RF manufacturers make a transmitter no larger than a portable receiver. The transmitter can be attached to a belt, hung around the neck or placed in a pocket. A lavaliere or headset boom mic to the transmitter will free up the hands of the guide.

Sports arenas and large concert halls with more than 3,000 seats, such as Madison Square Garden and Radio City Music Hall, are both examples of spaces that are so vast, trying to cover every seat with IR would require so many emitters that it is almost cost prohibitive. A single-channel RF system will satisfy ADA requirements.

IR and RF wireless systems have flourished thanks to the ADA, but assistive listening is not the only use for these systems. More and more venues are using it to offer sight description to the visually impaired. There is also an increasing multilingual market, and wireless is filling the void using both single and multi-channel systems for simultaneous interpretation. Manufacturers of both IR and RF equipment offer systems ranging in price and quality enough to meet everyone's budget and keep every contractor busy. ■

Harris is the customer service manager for Sound Associates. He can be reached at 1-800-775-8200 or steveh@soundassoc.com.